

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
11 April 2002 (11.04.2002)


PCT

(10) International Publication Number  
**WO 02/029380 A3**

- (51) International Patent Classification<sup>7</sup>: **G01N 1/24, 1/34, B01D 47/02**
- (21) International Application Number: **PCT/GB01/04387**
- (22) International Filing Date: **1 October 2001 (01.10.2001)**
- (25) Filing Language: **English**
- (26) Publication Language: **English**
- (30) Priority Data:  
**0024227.1 4 October 2000 (04.10.2000) GB**
- (71) Applicant (for all designated States except US): **THE SECRETARY OF STATE FOR DEFENCE [GB/GB]; DSTL, Porton Down, Salisbury, Wiltshire SP4 0JQ (GB).**
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **SQUIRRELL, David, James [GB/GB]; DSTL, Porton Down, Salisbury, Wiltshire SP4 0JQ (GB). SYMONDS, William, Hunter [GB/GB]; DSTL, Porton Down, Salisbury, Wiltshire SP4 0JQ (GB). BIRD, Hilary, Anne [GB/GB]; DSTL, Porton Down, Salisbury, Wiltshire SP4 0JQ (GB). BERRY,**
- (81) Designated States (national): **AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.**
- (84) Designated States (regional): **ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).**
- Published:  
— with international search report

[Continued on next page]

(54) Title: **AIR SAMPLERS**

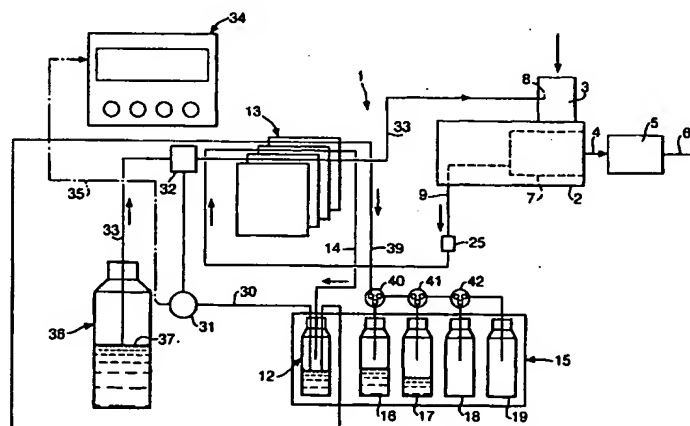

(57) Abstract: With reference to Figure 1, and air sampler 1 for use in analysing biological or other analytes, comprises an airflow chamber 2 having an air inlet 3 and an air outlet 4. An extract from 5, draws ambient air in through the inlet 3, and then through the chamber 2, to discharge it back to atmosphere by way of an outlet 6. The airflow chamber 2 houses a cyclone air/liquid separator 7 through which the inflowing air is caused to pass. An injector 8 introduces liquid into air flowing through the air inlet 3. The cyclone separator 7 extracts this liquid and any entrained particles therein and discharges it from the airflow chamber 2, initially by way of a duct 9, where it is then conveyed to a collection vessel 12, by way of a three channel peristaltic pump 13, and a duct 14. The collection vessel 12 is housed within a Peltier-cooled holder 15 to maintain the contents of the vessel 12 within the 2 °C - 8 °C range which is desirable for maintaining the integrity of biological analytes such as bacteria or proteins. Analyses such as PCR, culture on agar plates or immunoassays may be performed on the collected samples. The holder 15 also houses sample bottles 16, 17, 18 and 19.

WO 02/029380 A3



(88) Date of publication of the international search report:  
1 August 2002

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB 01/04387

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 G01N1/24 G01N1/34 B01D47/02

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 G01N B01D B01L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the International search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 927 578 A (CONTROLES LAB ET) 7 July 1999 (1999-07-07) abstract; claims 11-22; figure 1 page 5, line 17 -page 5, line 56 page 7, line 17 -page 11, line 43 ---	1-7
A	EP 0 668 095 A (SECR DEFENCE BRIT) 23 August 1995 (1995-08-23) abstract; figures 1,2 column 1, line 49 -column 2, line 56 column 4, line 8 -column 5, line 8 ---	1-7
A	EP 0 213 031 A (COMMISSARIAT ENERGIE ATOMIQUE) 4 March 1987 (1987-03-04) abstract; claims 1,2; figure 1 column 2, line 52 -column 4, line 12 ---	1
	-/-	

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

## \* Special categories of cited documents:

\*A\* document defining the general state of the art which is not considered to be of particular relevance

\*E\* earlier document but published on or after the International filing date

\*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

\*O\* document referring to an oral disclosure, use, exhibition or other means

\*P\* document published prior to the International filing date but later than the priority date claimed

\*T\* later document published after the International filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

\*&amp;\* document member of the same patent family

Date of the actual completion of the International search

5 April 2002

Date of mailing of the International search report

16/04/2002

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax (+31-70) 340-3016

Authorized officer

Runser, C

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB 01/04387

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 154 891 A (BRENNER KARL S) 13 October 1992 (1992-10-13) abstract; figure 1 column 2, line 34 -column 3, line 31 -----	1

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/GB 01/04387

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 0927578	A	07-07-1999	FR EP 2773217 A1 0927578 A1	02-07-1999 07-07-1999
EP 0668095	A	23-08-1995	EP 0668095 A1	23-08-1995
EP 0213031	A	04-03-1987	FR 2586108 A1 DE 3680260 D1 EP 0213031 A2	13-02-1987 22-08-1991 04-03-1987
US 5154891	A	13-10-1992	DE 3937134 A1 DE 59008136 D1 DK 427089 T3 EP 0427089 A2 JP 3174250 A	16-05-1991 09-02-1995 27-02-1995 15-05-1991 29-07-1991

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
11 April 2002 (11.04.2002)

PCT

(10) International Publication Number  
**WO 02/29380 A2**

- (51) International Patent Classification<sup>7</sup>: **G01N 1/00**
- (21) International Application Number: **PCT/GB01/04387**
- (22) International Filing Date: **1 October 2001 (01.10.2001)**
- (25) Filing Language: **English**
- (26) Publication Language: **English**
- (30) Priority Data:  
**0024227.1**      **4 October 2000 (04.10.2000)**      **GB**
- (71) Applicant (*for all designated States except US*): **THE SECRETARY OF STATE FOR DEFENCE [GB/GB]; DSTL, Porton Down, Salisbury, Wiltshire SP4 0JQ (GB).**
- (72) Inventors; and
- (75) Inventors/Applicants (*for US only*): **SQUIRRELL, David, James [GB/GB]; DSTL, Porton Down, Salisbury, Wiltshire SP4 0JQ (GB). SYMONDS, William, Hunter [GB/GB]; DSTL, Porton Down, Salisbury, Wiltshire SP4 0JQ (GB). BIRD, Hilary, Anne [GB/GB]; DSTL, Porton Down, Salisbury, Wiltshire SP4 0JQ (GB). BERRY, Martin, John [GB/GB]; DSTL, Porton Down, Salisbury, Wiltshire SP4 0JQ (GB).**
- (54) Agent: **SKELTON, Stephen, Richard; D/IPR Formalities Section, Poplar 2, MOD Abbey Wood #2218, Bristol BS34 8JH (GB).**
- (81) Designated States (*national*): **AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MY, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.**
- (84) Designated States (*regional*): **ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).**
- Published:**  
— *without international search report and to be republished upon receipt of that report*
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**WO 02/29380 A2**

(54) Title: **AIR SAMPLERS**

(57) Abstract: With reference to Figure 1, and air sampler 1 for use in analysing biological or other analytes, comprises an airflow chamber 2 having an air inlet 3 and an air outlet 4. An extract from 5, draws ambient air in through the inlet 3, and then through the chamber 2, to discharge it back to atmosphere by way of an outlet 6. The airflow chamber 2 houses a cyclone air/liquid separator 7 through which the inflowing air is caused to pass. An injector 8 introduces liquid into air flowing through the air inlet 3. The cyclone separator 7 extracts this liquid and any entrained particles therein and discharges it from the airflow chamber 2, initially by way of a duct 9, where it is then conveyed to a collection vessel 12, by way of a three channel peristaltic pump 13, and a duct 14. The collection vessel 12 is housed within a Peltier-cooled holder 15 to maintain the contents of the vessel 12 within the 2 °C - 8 °C range which is desirable for maintaining the integrity of biological analytes such as bacteria or proteins. Analyses such as PCR, culture on agar plates or immunoassays may be performed on the collected samples. The holder 15 also houses sample bottles 16, 17, 18 and 19.

## AIR SAMPLERS

5 This invention relates to air samplers and particularly, but not exclusively, relates to air samplers for sampling the ambient atmosphere, in order to detect and measure contamination that may be present.

10 The present invention provides an air sampler for collecting cumulative samples from large volumes of air in small volumes of liquid, (e.g. particles from 100 cubic metres of air in about 10mls of liquid).

In addition sequential samples may be taken automatically. These samples may be kept cool to preserve them for later analysis.

15 According to the present invention, an air sampler comprises an air flow chamber having an air inlet and an air outlet, means for introducing liquid into air flowing through the chamber so as to entrain any particles present in the airflow, means for collecting the entraining liquid and any entrained particles therein, and for depositing the same in a collection vessel, means for returning collected entraining liquid to the airflow chamber, means for detecting the presence of bubbles in the returning liquid, and operable to  
20 introduce fresh entraining liquid into air flowing through the airflow chamber, and means for collecting a sample of the entraining liquid and any particles therein, which may be present in said collection vessel.

25 An embodiment of the invention will now be described by way of example only, with reference to the accompanying drawings wherein:-

Figure 1 is a diagrammatic illustration of the air sampler, and

Figure 2 is an enlarged detail of part of Figure 1.

30

With reference to Figure 1, an air sampler 1 for use in analysing biological analytes, comprises an airflow chamber 2 having an air inlet 3 and an air outlet 4.

An air mover 5, conveniently an extraction fan, draws ambient air at 500 to 1000 litres per minute in through the inlet 3, and then through the chamber 2, to discharge it back to atmosphere by way of an outlet 6.

5 The air flow chamber 2 houses a cyclone air/liquid separator 7 through which the inflowing air is caused to pass.

Means comprising an injector 8 introduces liquid into air flowing through the air inlet 3. The cyclone separator 7 extracts this liquid and any entrained particles therein and  
10 discharges it from the airflow chamber 2, initially by way of a duct 9, where it is then conveyed to a collection vessel 12, by way of one channel of a single three channel peristaltic pump 13 and a duct 14. The collection vessel 12 is housed within a Peltier-cooled holder 15 to maintain the contents of the vessel 12 within the 2°C - 8°C range which is desirable for maintaining the integrity of biological analytes such as bacteria or  
15 proteins. Analyses such as PCR, (Polymerase Chain Reaction), culture or agar plates or immunoassays may be performed on the collected samples.

The holder 15 also houses bottles 16,17,18 and 19.

20 A large pore (e.g. 25 micron) filter unit 25 is fitted in the duct 9 to remove large particulates present in the collected air which are unsuitable for a particular assay. Diesel soot, for example. The filter unit 25 will, however, allow soluble analytes or small particulate analytes, such as bacteria and viruses, to pass through.

25 The sampler 1 further comprises recirculation means for returning collected entraining liquid from the vessel 12 to the airflow chamber 2 where it is discharged to air flowing into the cyclone 7. These means comprise an extraction line 30, a bubble detector 31, a pinch valve 32, and a discharge line 33 which passes through another of the three channels of pump 13. The bubble detector 31 is connected to electronic circuitry, which  
30 includes, a programmable timer 34, by way of an electronic signal line 35. The circuitry incorporates a controlling microprocessor.



5 A reservoir 36 houses entrainment liquid 37, comprising de-ionised water containing 0.01 % of a non-ionic detergent such as Tween-20 and 10mM HEPES N-2-hydroxyethyl piperazine - N<sup>1</sup>-2 ethane sulphonic acid buffer; pH 7.5. Line 33 draws this liquid from the reservoir 36 by way of the pinch valve 32, and passes it, via a needle-gauge stainless tube, which forms the injector 8, into the air flow inlet 3, at about 2.0millilitres per minute.

10 Aerosol particles entrained into the liquid stream exit from the air flow chamber 2, (via a standard Luer-fitting port), and through pump 13, to be deposited in the collection vessel 12.

15 The collection fluid is re-circulated from the vessel 12 back into the airflow chamber 2 by way of line 30, bubble detector 31, pinch valve 32, pump 13 and line 33. This continues until the level of liquid within the vessel 12 falls to a point whereby air rather than liquid is drawn into line 30. When the entrained air reached the bubble detector 31, an electronic signal is sent via line 35 to the microprocessor in the electronic circuitry which includes programmable timer 34. The microprocessor then operates the pinch valve 32, so that, for a pre-set period of time, fresh collection fluid is drawn from the reservoir 36 and discharged into the airflow chamber 2, by way of line 33, pinch valve 20 32, pump 13, line 33 and injector 8.

25 After the set period the pinch valve 32 is operated so that the system is restored to the re-circulation mode, which continues until the liquid level falls again in vessel 12, and air is again entrained.

A time delay is built into the system so as to allow fluid from the re-charged vessel 12 to reach the bubble detector 31.

30 In addition, a start up routine is programmed into timer 34 to allow initial charging of the system.

As mentioned above, pump 13 is a single three channel pump. Two of the channels of the pump are used for pumping liquid into and out of the airflow chamber 2. The remaining channel is used to draw off small volumes of liquid for discharge to a selected one or more of the sample bottles 16, 17, 18 and 19, via line 39 and three-way valves 40, 41 and 42. (See Figure 2).

In this example, the flow rate of entraining liquid into the airflow chamber 2 and cyclone 7 is ca.2 millilitres per minute, the sample for analysis may be drawn off at a much lower rate of ca.50 microlitres per minute, using smaller bore tubing. This allows an integrated sample of aerosol particles to be collected for up to 8 hours into a standard 25ml "universal" bottle. In the present embodiment there are four sample bottles, (16-19) so monitoring the air for an 8-hour working shift, or a full 24 hour day, is possible without the need for an operator to be present. In addition, the programmable timer 34 allows the equipment to be positioned and then to be activated automatically at set times up to one week in advance. For 4 samples, the 3-way valves (40-42) are needed to direct the sample flow.

The collected samples are subsequently analysed in the conventional manner.


**CLAIMS**

1. An air sampler comprising an airflow chamber having an air inlet and an air outlet, means for introducing liquid into air flowing through the chamber so as to entrain any particles present in the airflow, means for collecting the entraining liquid and any entrained particles therein, and for depositing the same in a collection vessel, means for returning collected entraining liquid to the airflow chamber, means for detecting the presence of bubbles in the returning liquid, and operable to introduce fresh entraining liquid into air flowing through the airflow chamber, and means for collecting a sample of the entraining liquid and any particles therein, which may be present in said collection vessel.
2. An air sampler as claimed in Claim 1, provided with programmable timer means operable to obtain air samples at pre-determined times.
3. An air sampler as claimed in Claim 2, incorporating a microprocessor for controlling the sampler.
4. An air sampler as claimed in Claim 1, 2 or 3, wherein said fresh entraining liquid is introduced when the level in the collection vessel falls to a level whereby air is entrained in the returned collected liquid, and is detected by the said means for detecting bubbles.
5. An air sampler as claimed is any one of Claims 1 to 4, provided with a plurality of sampler bottles and means for drawing-off liquid so as to divert it to the bottles.
6. An air sampler as claimed in any one of Claims 1 to 5, provided with a three channel pump and a plurality of sample bottles, wherein two of the channels of the pump are used for pumping liquid into and out of the airflow chambers and the third channel is used to draw-off liquid and divert it to a selected sample bottle.

7. An air sampler as claimed in Claim 6, wherein the pumps is a single, three channel peristaltic pump.
8. An air sampler, substantially as herein before described, with reference to the accompanying drawings.

5

1/2

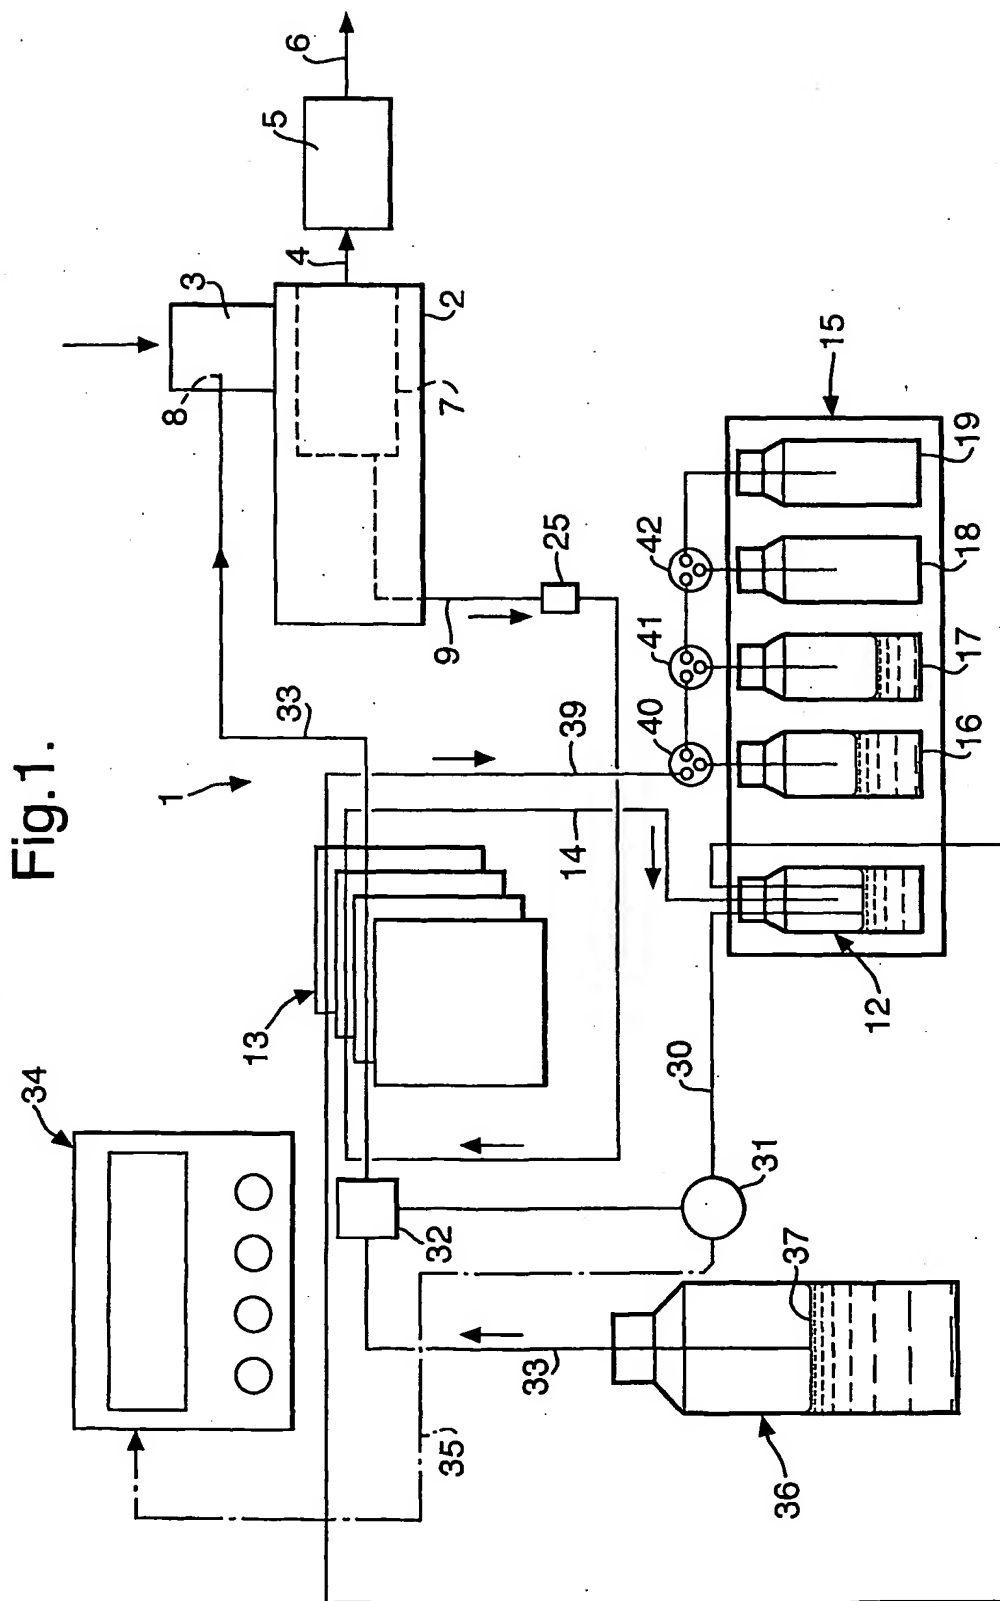

2/2

Fig.2.

